


## Florida approval update - as of 7-14-15

### Plastpro Cheat Sheet Instructions

- 1 - Look at the Florida wind map below. Where is the structure to be built - Non-impact (white area), Florida Impact (dark blue area plus purple coastal lines) or HVHZ (light blue cross hatched area)?
- 2 - What is the height of the door - 6/8 or 8/0?
- 3 - What is the layout - single door, single with sidelights, double door or double with sidelights?
- 4 - Do the movable door panels have glass or are they opaque?
- 5 - Apply the information above to the spreadsheet to determine which approval you need.
- 6 - Go to [www.floridabuilding.org/pr/pr\\_app\\_srch.aspx](http://www.floridabuilding.org/pr/pr_app_srch.aspx) and plug in the number next to "FL". Enter your number and hit "Enter".
- 7 - Click on the blue number and hit "Enter". Scroll down to the list. Look under "Description" until you see the desired unit.
- 8 - Click on the blue "Installation Instructions". You will get a downloadable, printable PDF that can be given to the building department.

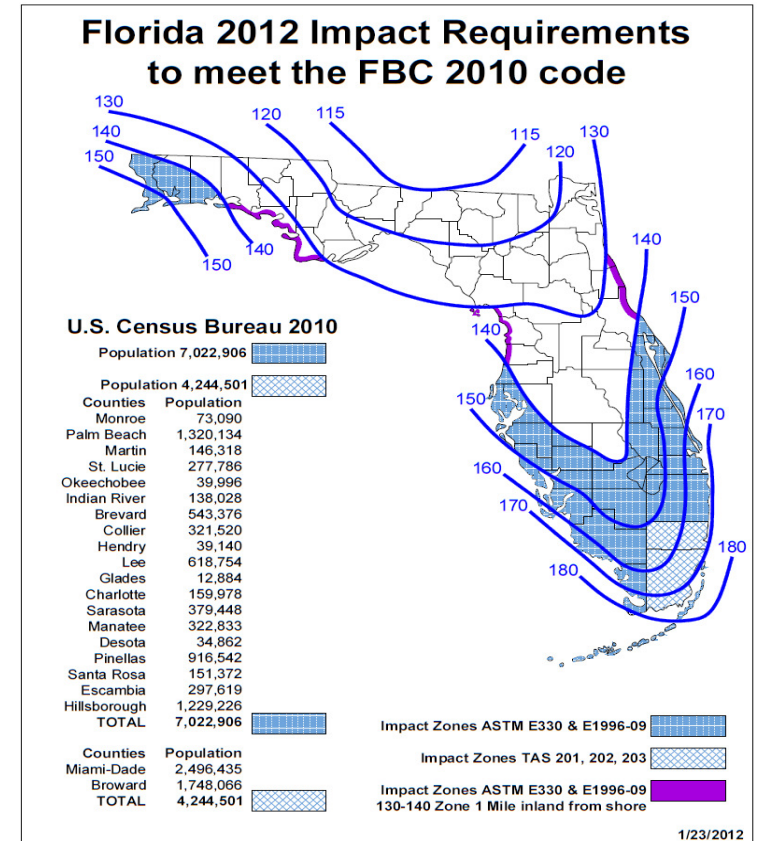

**NON-IMPACT PAGE**

**2010 CODE COMPLIANCE LIST FOR PLASTPRO DOORS**

THIS DOCUMENT IS SUBJECT TO REVIEW AND CORRECTION. USE IT ONLY AS A GUIDE.



ITEMS IN THE SECTION BELOW MEET **NON-IMPACT REQUIREMENTS FOR ALL AREAS EXCEPT DADE & BROWARD COUNTIES**

Sum

HEIGHT	IMPACT	HVHZ	TYPE	FL #	DESIGN PRESSURE		DESIGN PRESSURE		DESIGN PRESSURE		DESIGN PRESSURE		NOTES
					SINGLE		DOUBLE		SINGLE W/ SL		DOUBLE W/ SL		
					OPAQUE	GLAZED	OPAQUE	GLAZED	OPAQUE	GLAZED	OPAQUE	GLAZED	
6/8	No	No	All skins	15213.2 to .8					±47 to ±50		±50		6, 15, 19
6/8	No	No	All skins	15213.9 to .13		±50 to ±60		±47		±50 to +50 -60		±47	4, 6, 15, 19
6/8	No	No	All skins	15213.14 to .18		+47 -50 to ±50		±47 to ±50		+48 -50 to ±50		+47 -50 to ±50	4, 6A, 15
6/8	No	No	All skins	15220.1 to .10	±50		±50	±50		±50		±50	8, 16
6/8	No	No	All skins	15221.1 & .6	±70	±35 to ±50							4, 11
6/8	No	No	All skins	15221.3 & .8									4, 10, 15
6/8	No	No	All skins	15221.4, .5, .9 & .10			±50 to +50 -55			±55 to +55 -60	±45	±45	4, 7, 15
6/8	No	No	All skins	15221.2, .7	±55	±45			±35 to +35 -45	±35 to ±45			9, 10, 15
6/8	No	No	All skins	17347.1, .2, .10 & .11	±60 to +60 -65	±47	±50	±47	±47	±35 to ±47		±47	1, 4, 6A, 16
6/8	No	No	All skins	15362.4 to .6	+65 -70	+45 -50 to +60 -65	±50		±56	+45 -50 to +50 -55			21
6/8	No	No	FI Glaze	15215.1 to .4		±50		±50		+48 -50 to +50 -54			4, 6, 15, 17
6/8	No	No	FI Glaze	15215.5								±50	4, 6, 16, 17
6/8	No	No	Trimmable	15219.1	±45 to ±75								1
6/8	No	No	Trimmable	15219.2		±45 to ±47.5							1
6/8	Yes	No	20 Min	15219.5 to .6	±65								1
7/0	No	No	All skins	17184.26 to .29	±55 to +55 -60	±45	±50 to +50 -55	±45	±45	±45	±45	±45	1, 5, 8, 16
8/0	No	No	Rustic	15209.1 & .3	±75		±55		±55		±55		1, 7, 15
8/0	No	No	All skins	15220.11 to .15		±47		±47		±47		±47	8, 16
8/0	No	No	All skins	15213.20, .22, .25, .27		±47			±47		±47		6, 15, 19
8/0	No	No	All skins	17184.34 to .37	±55 to +55 -60	±45	±50 to +50 -55	±45	±45	±45	±45	±45	1, 4, 5, 8, 16
8/0	No	No	All skins	15213.28 to .31				±47		±40		±40	6, 15, 19
8/0	No	No	All skins	15213.21, .23, .26					±40 to +42 -48		±40 to +42 -48		4, 6, 15, 19
8/0	No	No	All skins	15213.32 to .37	±75	±42 to +42 -48		±37.5		±42 to +42 -48		±40	4, 15
8/0	No	No	All skins	15213.38 & .39			±37.5 or ±40 or ±55						4, 6
8/0	No	No	All skins	15213.40							±40		4, 6A, 16
8/0	No	No	All skins	17347.3, .4, .11 & .12	±60 to +60 -65	±47	±45 to +45 -50	±47	±40 to +45 -50	±40 to +45 -50	±45 to +45 -50	±45 to +45 -50	1, 4, 6A, 16
8/0	No	No	FI Glaze	15215.6 to .9		±47.5 to ±50		±47.5 to ±50		±42 to +42 -48			4, 6, 15, 17
8/0	No	No	FI Glaze	15215.10								±47.5 to ±50	4, 6, 16, 17
8/0	Yes	No	20 Min	15219.7 to .8	±65								1
3/6 x 8/0	No	No	All skins	15209.1 & .2	±60				±55				1, 8, 15
6/8	No	No	Transom	16224.1		±70				±70			68.5" x 17"
6/8	No	No	STEEL	15962.1 to .4	±47 to +47-50	±47 to +47-50	±47 to +47-50	±47 to +47-50	±47 to +47-50	±47 to +47-50	±47 to +47-50	±47 to +47-50	4, 16

**NOTES:**

- 1 - ADA sill option
- 2 - Outswing only
- 3 - Inswing only
- 4 - Door swing affects DP
- 5 - Multi-point lock option
- 6 - Back to back **WOOD** jamb

- 6A - Back to back wood or Plastpro jamb
- 7 - 1x between door & sidelite jambs
- 8 - 2x between door & sidelite jambs
- 9 - Transom option
- 10 - Plastpro mullion
- 11 - All Plastpro glass options including Speakeasy, DP is affected

- 15 - 14" max sidelite width
- 16 - 36" max sidelite width
- 17 - Includes Craftsman style doors
- 19 - Plastpro snap frame glass option
- 21 - Dunbarton Achiever one piece frame

Florida approval update - as of 7-14-15



## FLORIDA IMPACT PAGE

### 2010 CODE COMPLIANCE LIST FOR PLASTPRO DOORS

THIS DOCUMENT IS SUBJECT TO REVIEW AND CORRECTION. USE IT ONLY AS A GUIDE.



ITEMS IN THE SECTION BELOW MEET FLORIDA IMPACT REQUIREMENTS FOR ALL AREAS **EXCEPT** DADE & BROWARD COUNTIES

HEIGHT	IMPACT	HVHZ	TYPE	FL #	DESIGN PRESSURE		DESIGN PRESSURE		DESIGN PRESSURE		DESIGN PRESSURE		NOTES
					SINGLE		DOUBLE		SINGLE W/ SL		DOUBLE W/ SL		
					OPAQUE	GLAZED	OPAQUE	GLAZED	OPAQUE	GLAZED	OPAQUE	GLAZED	
6/8	Yes	No	All skins	17184.21 to .25		±50		±50		±50		±50	1, 8, 16
6/8	Yes	No	All skins	15187.1 to .3	±65		±55		±55 & +55 -60		±55		1, 4, 7, 8, 15
6/8	Yes	No	All skins	17184.11 to .15	±65 to +65 -70		±50		±50		±50		4, 8, 16
6/8	Yes	No	All skins	9231.1	+65 -70								22
6/8	Yes	No	All skins	15341.11	±50								1, 19
6/8	Yes	No	All skins	15366.6	±50								1, 20
6/8	Yes	No	All skins	17347.5, .6, .13 & .14	±60 to +60 -65	±50	±50	±50	±47	±35 to ±50	±47	±50	1, 4, 6A, 16, 23
6/8	Yes	No	Fl Glaze	15215.11 to .14		±50		±50		±50			6A, 16
6/8	Yes	No	Fl Glaze	15215.15								±50	16
6/8	Yes	No	Trimtable	15219.3 & .4	±75	±60							1
6/8	Yes	No	20 Min	15219.5 to .6	±65								1
7/0	Yes	No	All skins	17184.30 to .33	±50 to +50 -55	±50 to +50 -55	±50 to +50 -55	±50 to +50 -55	±50 to +50 -55	±50 to +50 -55	±50 to +50 -55	±50 to +50 -55	1, 5, 8, 16
8/0	Yes	No	All skins	17184.1 to .5		±50		±50		±50		±50	8, 16
8/0	Yes	No	Rustic	15209.6 to .8	±55 to ±60		±60		±55 to +60 -65		±60		1, 8, 15
8/0	Yes	No	All skins	16094.3 & .4		±47.5 to ±50		±47.5 to ±50		±47.5 to ±50		±47.5 to ±50	4, 16
8/0	Yes	No	All skins	17184.16 to .20	±65 to +65 -70		±45 to +45 -50		±50		±45 to +45 -50		4, 8, 16
8/0	Yes	No	All skins	17184.38 to .41	±55 to +55 -60	±50 to +50 -55	±50 to +50 -55	±50 to +50 -55	±50 to +50 -55	±50 to +50 -55	±50 to +50 -55	±50 to +50 -55	1, 4, 5
8/0	Yes	No	All skins	17347.7, .8, .15 & .16	±60 to +60 -65	±45 to +45 -50	±45 to +45 -50	±45 to +45 -50	±40 to +45 -50	±40 to +45 -50	±45 to +45 -50	±45 to +45 -50	1, 4, 6A, 16, 23
8/0	Yes	No	Fl Glaze	15215.16 to .19		±47.5 to ±50		±47.5 to ±50		±42 to +42 -47.5			4, 6, 15
8/0	Yes	No	Fl Glaze	15215.20								±47.5 to ±50	6A, 16
8/0	Yes	No	20 Min	15219.7 to .8	±65								1
3/6 X 8/0	Yes	No	All skins	15209.4 & .5	±60				±55				1, 8, 15
6/8	Yes	No	STEEL	15962.5 & .6	±55		±55		±55		±55		2, 8, 15
6/8	Yes	No	STEEL	15962.7		±40				±40			2, 8, 15
6/8	Yes	No	STEEL	15962.8				±40				±40	2, 6, 8, 15

**NOTES:**

- |  |   |
|--|---|
| <ul style="list-style-type: none"> <li>1 - ADA sill option</li> <li>2 - Outswing only</li> <li>4 - Door swing affects DP</li> <li>5 - Multi-point lock option</li> <li>6 - Back to back <b>WOOD</b> jamb</li> <li>6A - Back to back Plastpro jamb</li> </ul> | <ul style="list-style-type: none"> <li>7 - 1x between door &amp; sidelite jambs</li> <li>8 - 2x between door &amp; sidelite jambs</li> <li>15 - 14" max sidelite width</li> <li>16 - 36" max sidelite width</li> <li>19 - Dunbarton Rediflex split frame</li> <li>20 - Dunbarton Rediframe one-piece frame</li> </ul> |
|--|---|

Florida approval update - as of 7-14-15



## HVHZ IMPACT & NON-IMPACT PAGE

### 2010 CODE COMPLIANCE LIST FOR PLASTPRO DOORS

THIS DOCUMENT IS SUBJECT TO REVIEW AND CORRECTION. USE IT ONLY AS A GUIDE.



#### ITEMS IN THE SECTION BELOW MEET FLORIDA IMPACT REQUIREMENTS FOR DADE & BROWARD COUNTIES (HVHZ)

HEIGHT	IMPACT	HVHZ	TYPE	FL #	DESIGN PRESSURE		DESIGN PRESSURE		DESIGN PRESSURE		DESIGN PRESSURE		NOTES
					SINGLE		DOUBLE		SINGLE W/ SL		DOUBLE W/ SL		
					OPAQUE	GLAZED	OPAQUE	GLAZED	OPAQUE	GLAZED	OPAQUE	GLAZED	
6/8	Yes	Yes	All skins	15180.1 to .5		±50		±50		±50		±50	2, 8, 12, 16
6/8	Yes	Yes	All skins	15180.11 to .15	±47.5 to ±50		±47.5 to ±50		±47.5 to ±50		±50		4, 8, 12, 16
6/8	Yes	Yes	All skins	15210.1 to .6	±50 & ±75	±50 to ±75	±50 to ±60	±50 to ±75	±50 to ±75	±50 to ±75	±50		1, 5, 8, 16
6/8	Yes	Yes	Fl Glaze	12-0612.02								±50	2, 8, 15, 20, 21
6/8	Yes	Yes	Fl Glaze	12-0612.09				±50		±50		±50	8, 15, 20, 21, 23
6/8	No	Yes	All skins	15180.21 to .23					±50		±50		2, 8, 11, 16
6/8	No	Yes	All Std Doors	15220.1 to .10	±50	±50	±50	±50	±50	±50	±50	±50	8, 13, 14, 16
8/0	Yes	Yes	Sm & Texd	15180.16 to .20	±47.5 to ±50		±47.5 to ±50		±50		±50		2, 4, 8, 16
8/0	Yes	Yes	All skins	15210.7 to .14	±60 to ±90	±50 to ±65	±65 to ±90	±50 to ±65	±60	±50 to ±65	±50	±50 to ±65	2, 8, 12, 13, 16
8/0	Yes	Yes	Flush Glaze	12-0612.13								±50	15, 20, 22
8/0	No	Yes	All skins	15180.24 to .26					±50		±50		2, 8, 11, 16
8/0	No	Yes	All Std Doors	15220.11 to .15		±47		±47		±47		±47	8, 13, 14, 16
6/8	Yes	No	STEEL	15962.5 & .6	±55		±55		±55		±55		2, 8, 15
6/8	Yes	No	STEEL	15962.7 & .8		±40		±40		±40		±40	2, 8, 15

**NOTES:**

- |   |  |
|---|--|
| <ul style="list-style-type: none"> <li>1 - ADA sill option</li> <li>2 - Outswing only</li> <li>3 - Inswing only</li> <li>4 - Door swing affects DP</li> <li>5 - Multi-point lock option</li> <li>8 - 2x between door &amp; sidelite jambs</li> <li>11 - HVHZ door with non-impact glass. Glass must be protected.</li> <li>12 - Surface bolts affect DP rating</li> </ul> | <ul style="list-style-type: none"> <li>13 - Outswing meets water infiltration requirements for HVHZ</li> <li>14 - Standard non-HVHZ door. Must be completely protected.</li> <li>15 - 14" max sidelite width</li> <li>16 - 36" max sidelite width</li> <li>20 - This is a Dade NOA</li> <li>21 - Endura Fatboy mull</li> <li>22 - Nan Ya 5/8" aluminum mullion reinforcement</li> <li>23 - Inswing only</li> </ul> |
|---|--|